

STUD TYPE TRACK ROLLERS


충진형, mm치수

FULL COMPLEMENT OF NEEDLE ROLLER

METRIC DIMENSION



CF..V

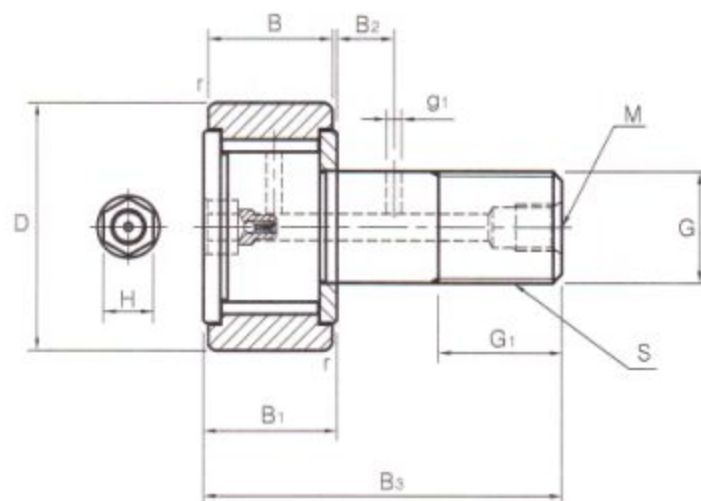

CF..V

스터드경 (Stud diameter) G mm	호 칭 번 호 (Bearing No.)				질 량 (Mass) gr.	주 요 치 수 (Dimensions) mm		
	씰 없음 (Unsealed)		씰 부착 (Sealed)			H	D	나 사 (Thread sizes) S
	원통외륜 (Cylindrical outer ring)	구면외륜 (Crowned outer ring)	원통외륜 (Cylindrical outer ring)	구면외륜 (Crowned outer ring)				
	CF_V	CF_VR	CF_VUU	CF_VUUR				
3	*CF 3V	CF 3VR	CF 3VUU	CF 3VUUR	5	2	10	M 3×0.5
4	*CF 4V	CF 4VR	CF 4VUU	CF 4VUUR	8	2.5	12	M 4×0.7
5	CF 5V	CF 5VR	CF 5VUU	CF 5VUUR	11	3	13	M 5×0.8
6	CF 6V	CF 6VR	CF 6VUU	CF 6VUUR	19	3	16	M 6×1.0
8	CF 8V	CF 8VR	CF 8VUU	CF 8VUUR	29	4	19	M 8×1.25
10	CFA 10V	CFA 10VR	CFA 10VUU	CFA 10VUUR	46	4	22	M10×1.0
	CFA 10-1V	CFA 10-1VR	CFA 10-1VUU	CFA 10-1VUUR	61		26	
10	CF 10V	CF 10VR	CF 10VUU	CF 10VUUR	46	4	22	M10×1.25
	CF 10-1V	CF 10-1VR	CF 10-1VUU	CF 10-1VUUR	61		26	
12	CF 12V	CF 12VR	CF 12VUU	CF 12VUUR	97	6	30	M12×1.5
	CF 12-1V	CF 12-1VR	CF 12-1VUU	CF 12-1VUUR	107		32	
16	CF 16V	CF 16VR	CF 16VUU	CF 16VUUR	173	6	35	M16×1.5
18	CF 18V	CF 18VR	CF 18VUU	CF 18VUUR	255	10	40	M18×1.5
20	CF 20V	CF 20VR	CF 20VUU	CF 20VUUR	465	10	52	M20×1.5
	CF 20-1V	CF 20-1VR	CF 20-1VUU	CF 20-1VUUR	390		47	
24	CF 24V	CF 24VR	CF 24VUU	CF 24VUUR	820	12	62	M24×1.5
	CF 24-1V	CF 24-1VR	CF 24-1VUU	CF 24-1VUUR	1,140		72	
30	CF 30V	CF 30VR	CF 30VUU	CF 30VUUR	1,870	12	80	M30×1.5
	CF 30-1V	CF 30-1VR	CF 30-1VUU	CF 30-1VUUR	2,030		85	
	CF 30-2V	CF 30-2VR	CF 30-2VUU	CF 30-2VUUR	2,220		90	

▶ 註 CFA10과 CFA10-1 시리즈는 스터드부 나사가 M10×1.0입니다.
The thread size of CFA10 and CFA10-1 series are M10×1.0.


* 상기품목은 주문에 의하여 생산합니다.

* These types are produced on request.

STUD TYPE TRACK ROLLERS

충진형, mm치수

FULL COMPLEMENT OF NEEDLE ROLLER
METRIC DIMENSION

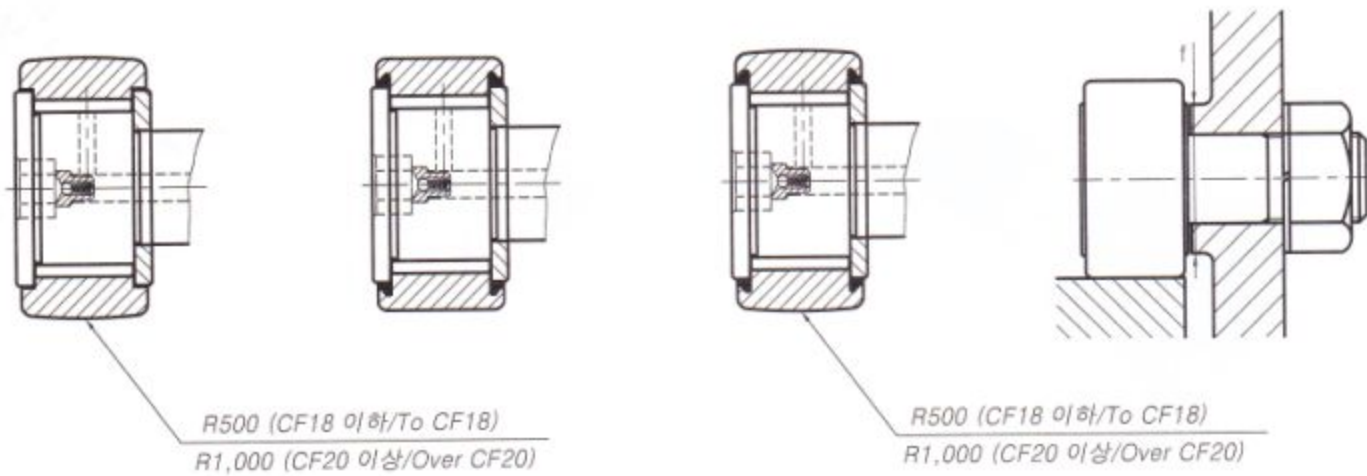

CF..VR

CF..VUU

CF..VUUR

주요 치수 (Dimensions) mm								설치치수 f 최소 (Minimum Clamping Diameter) mm	기본 동정격 하중 (Basic dynamic load ratings) C Kgf	기본 정정격 하중 (Basic static load ratings) Co Kgf	허용 회전수 (Limiting speed) rpm
B	B1	B3	M	g1	G1	B2	r				
7	8	17	-	-	5	-	0.3	6.8	260	440	20,000
8	9	20	-	-	6	-	0.5	8.6	370	540	17,000
9	10	23	-	-	7.5	-	0.5	9.7	440	650	15,000
11	12	28	-	-	9	-	0.5	11	640	780	12,000
11	12	32	-	-	11	-	0.5	13	750	1,030	9,000
12	13	36	-	-	13	-	1	15	870	1,330	7,000
12	13	36	-	-	13	-	1	15	870	1,330	7,000
14	15	40	M6×1.0	3	14	6	1.5	20	1,230	1,810	6,000
18	19.5	52	M6×1.0	3	18	8	1.5	24	1,900	3,460	4,500
20	21.5	58	M6×1.0	3	20	10	1.5	26	2,320	4,720	3,500
24	25.5	66	M6×1.0	4	22	12	1.5	36	3,040	5,920	3,500
29	30.5	80	M6×1.0	4	25	12	1.5	40	4,280	8,450	3,000
35	37	100	M6×1.0	4	32	15	2	46	6,210	13,230	2,000

▶ 註 조립 또는 오일 공급후 육각마개를 꼭히 막아야 합니다.
After assembly and oil lubrication, a hexagonal resin plug should be necessarily stopped up.