

STUD TYPE TRACK ROLLERS

충진형, mm치수, 편심형


FULL COMPLEMENT OF NEEDLE ROLLER

METRIC DIMENSION

ECCENTRIC RING



CFE

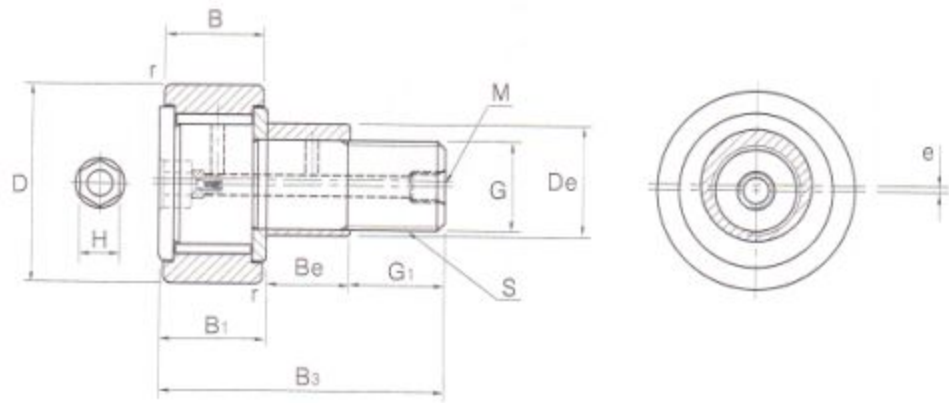

CFE..V

스터드경 (Stud diameter) G mm	호 칭 번 호 (Bearing No.)				질 량 (Mass) gr.	주 요 치 수 (Dimensions) mm		
	씰 없음 (Unsealed)		씰 부착 (Sealed)			H	D	나 사 (Thread sizes) S
	원통외륜 (Cylindrical outer ring)	구면외륜 (Crowned outer ring)	원통외륜 (Cylindrical outer ring)	구면외륜 (Crowned outer ring)				
	CFE..V	CFE..VR	CEF..VUU	CFE..VUUR				
6	CFE 6V	CFE 6VR	CFE 6VUU	CFE 6VUUR	20.5	3	16	M 6×1.0
8	CFE 8V	CFE 8VR	CFE 8VUU	CFE 8VUUR	32	4	19	M 8×1.25
10	CFAE 10V	CFAE 10VR	CFAE 10VUU	CFAE 10VUUR	49.5	4	22	M10×1.0
	CFAE 10-1V	CFAE 10-1VR	CFAE 10-1VUU	CFAE 10-1VUUR	65		26	
10	CFE 10V	CFE 10VR	CFE 10VUU	CFE 10VUUR	49.5	4	22	M10×1.25
	CFE 10-1V	CFE 10-1VR	CFE 10-1VUU	CFE 10-1VUUR	65		26	
12	CFE 12V	CFE 12VR	CFE 12V UU	CFE 12V UUR	105	6	30	M12×1.5
	CFE 12-1V	CFE 12-1VR	CFE 12-1VUU	CFE 12-1VUUR	115		32	
16	CFE 16V	CFE 16VR	CFE 16VUU	CFE 16VUUR	190	8	35	M16×1.5
18	CFE 18V	CFE 18VR	CFE 18VUU	CFE 18VUUR	280	8	40	M18×1.5
20	CFE 20V	CFE 20VR	CFE 20VUU	CFE 20VUUR	500	8	52	M20×1.5
	CFE 20-1V	CFE 20-1VR	CFE 20-1VUU	CFE 20-1VUUR	425		47	
24	CFE 24V	CFE 24VR	CFE 24VUU	CFE 24VUUR	895	8	62	M24×1.5
	CFE 24-1V	CFE 24-1VR	CFE 24-1VUU	CFE 24-1VUUR	1,220		72	
30	CFE 30V	CFE 30VR	CFE 30VUU	CFE 30VUUR	2,030	8	80	M30×1.5
	CFE 30-1V	CFE 30-1VR	CFE 30-1VUU	CFE 30-1VUUR	2,190		85	
	CFE 30-2V	CFE 30-2VR	CFE 30-2VUU	CFE 30-2VUUR	2,380		90	

▶ 註 CFA10과 CFA10-1 시리즈는 스터드부 나사가 M10×1.0 입니다.
The thread size of CFA10 and CFA10-1 series are M10×1.0.

▶ 註 이 품목은 주문에 의하여 생산합니다.
These types are produced on customer's request.


STUD TYPE TRACK ROLLERS

충진형, mm치수, 편심형

FULL COMPLEMENT OF NEEDLE ROLLER

METRIC DIMENSION

ECCENTRIC RING

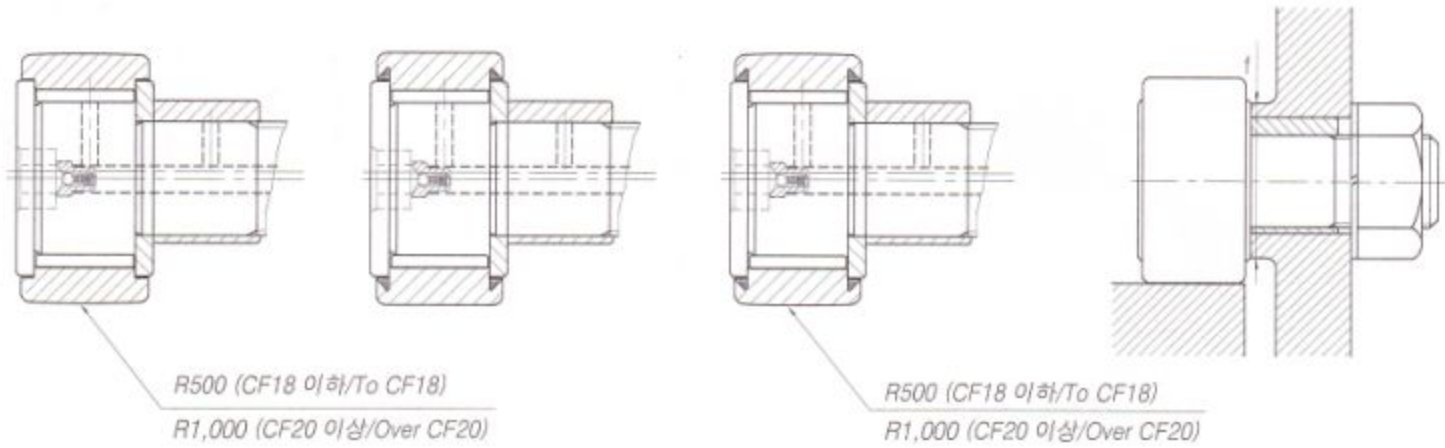

CFE..VR

CFE..VUU

CFE..VUUR

주요 치수 (Dimensions) mm									설치치수 f 최소 (Minimum Clamping Diameter) mm	기본 동정격 하중 (Basic dynamic load ratings) C Kgf	기본 정정격 하중 (Basic static load ratings) Co Kgf	허용 회전수 (Limiting speed) rpm
B	B1	B3	M	Gi	De	Be	e	r				
11	12	28	-	9	9	7.5	0.4	0.5	11	710	870	12,000
11	12	32	-	11	11	9.5	0.4	0.5	13	830	1,140	9,000
12	13	36	-	13	13	10.5	0.4	1	15	970	1,480	7,000
12	13	36	-	13	13	10.5	0.4	1	15	970	1,480	7,000
14	15	40	M6×1.0	14	16	11.5	0.8	1.5	20	1,370	2,010	6,000
18	19.5	52	M6×1.0	18	22	15.5	0.8	1.5	24	2,110	3,840	4,500
20	21.5	58	M6×1.0	20	24	17.5	0.8	1.5	26	2,580	5,240	3,500
24	25.5	66	M6×1.0	22	27	19.5	0.8	1.5	36	3,380	6,580	3,500
29	30.5	80	M6×1.0	25	33	25.5	0.8	1.5	40	4,750	9,390	3,000
35	37	100	M6×1.0	32	41	32.5	1.5	2	40	6,900	14,700	2,000

▶ 註 조립 또는 오일 공급후 육각마개를 필히 막아야 합니다.

After assembly and oil lubrication, a hexagonal resin plug should be necessarily stopped up.