

STUD TYPE TRACK ROLLERS


복열니들, mm치수

DOUBLE ROW OF NEEDLE ROLLER

METRIC DIMENSION



NUKR

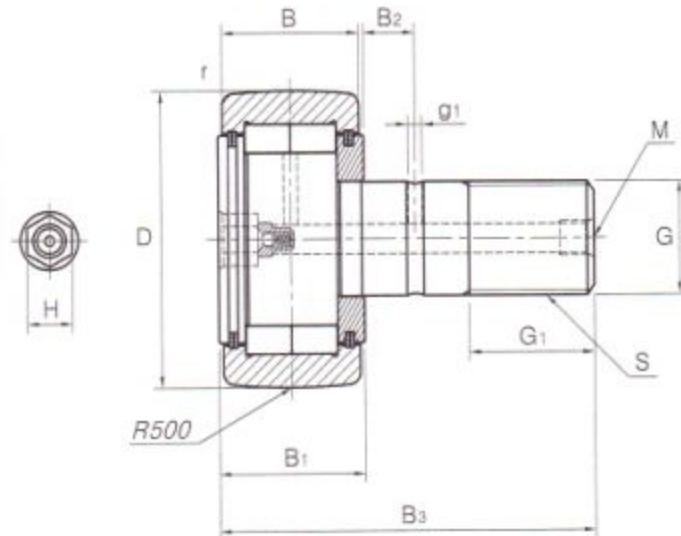

(D < 100mm)

스터드경 (Stud diameter) G mm	호 칭 번 호 (Bearing No.)		질 량 (Mass) gr.	주 요 치 수 (Dimensions) mm					
	구면외륜 (Crowned outer ring)	원통외륜 (Cylindrical outer ring)		H	D	나 사 (Thread sizes) S	B	B ₁	B ₃
16	NUKR 35R	NUKR 35SL	177	6	35	M16×1.5	18	19.5	52
18	NUKR 40R	NUKR 40SL	258	10	40	M18×1.5	20	21.5	58
20	NUKR 47R	NUKR 47SL	400	10	47	M20×1.5	24	25.5	66
20	NUKR 52R	NUKR 52SL	470	10	52	M20×1.5	24	25.5	66
24	NUKR 62R	NUKR 62SL	824	12	62	M24×1.5	29	30.5	80
24	NUKR 72R	NUKR 72SL	1,050	12	72	M24×1.5	29	30.5	80
30	NUKR 80R	NUKR 80SL	1,670	12	80	M30×1.5	35	37	100
30	NUKR 90R	NUKR 90SL	2,020	12	90	M30×1.5	35	37	100
36	NUKR 100R	NUKR 100SL	3,080	14	100	M36×1.5	43	46	120
42	NUKR 120R	NUKR 120SL	5,170	14	120	M42×1.5	50	53	140
48	NUKR 140R	NUKR 140SL	7,980	14	140	M48×1.5	57	60	160
52	NUKR 150R	NUKR 150SL	9,700	17	150	M52×1.5	60	63	170
56	NUKR 160R	NUKR 160SL	11,700	17	160	M56×3	63	67	180
60	NUKR 170R	NUKR 170SL	13,900	17	170	M60×3	66	70	190
64	NUKR 180R	NUKR 180SL	17,000	17	180	M64×3	72	76	200


▶ 註 NUKR 100이상은 주문에 의하여 생산합니다.
The sizes over NUKR 100 are produced on customer's request.

STUD TYPE TRACK ROLLERS

복열니들, mm치수

DOUBLE ROW OF NEEDLE ROLLER

METRIC DIMENSION

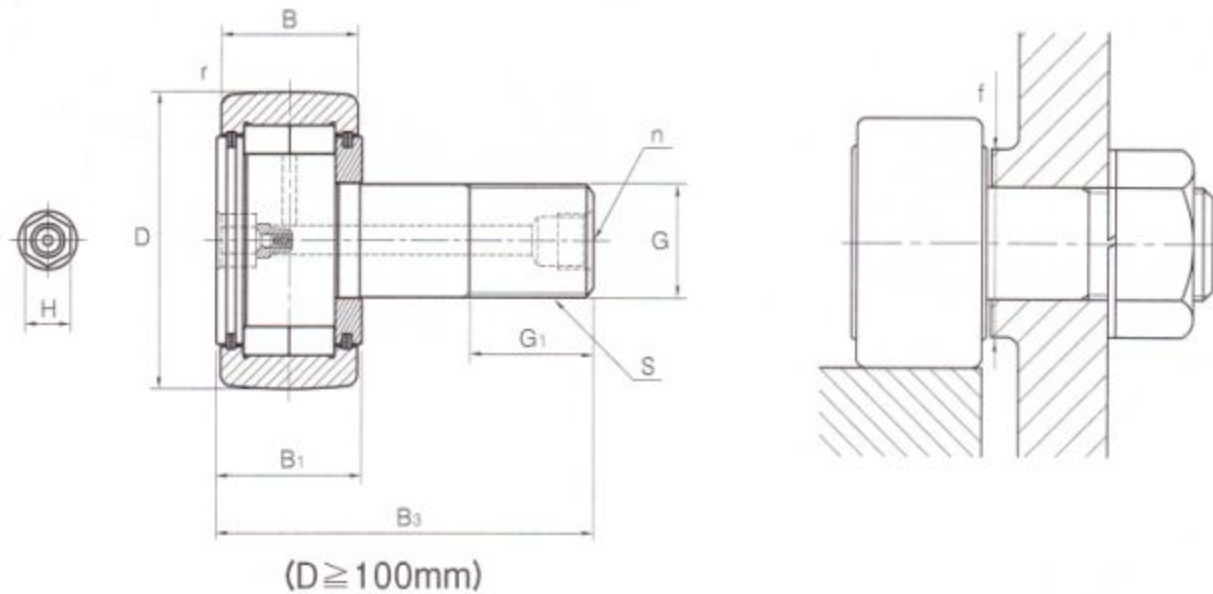

주요 치수 (Dimensions) mm						설치치수 f 최소 (Minimum Clamping Diameter) mm	기본 동정격 하중 (Basic dynamic load ratings) C Kgf	기본 정정격 하중 (Basic static load ratings) Co Kgf	허용 회전수 (Limiting speed) rpm
M	n	g1	G1	B2	r				
M6×1.0	-	3	17	8	0.6	21	1,380	1,540	6,500
M6×1.0	-	3	19	8	1.0	23	1,690	2,080	5,500
M6×1.0	-	4	21	9	1.0	27	2,570	3,210	4,200
M6×1.0	-	4	21	9	1.0	31	2,660	3,440	3,400
M6×1.0	-	4	25	11	1.0	38	3,670	4,590	2,600
M6×1.0	-	4	25	11	1.1	44	4,090	5,510	2,100
M6×1.0	-	4	32	15	1.1	47	6,330	9,000	1,800
M6×1.0	-	4	32	15	1.1	47	7,250	10,740	1,800
-	PT1/8	-	38	-	-	53	7,800	11,000	1,800
-	PT1/8	-	44	-	-	66	11,400	17,600	1,530
-	PT1/8	-	52	-	-	72.5	13,300	19,500	1,350
-	PT1/8	-	52	-	-	85.5	17,000	25,300	1,170
-	PT1/8	-	58	-	-	89.5	18,100	26,600	1,080
-	PT1/8	-	58	-	-	96.5	21,100	31,500	990
-	PT1/8	-	65	-	-	103.5	24,300	36,700	900

▶ 註 조립 또는 오일 공급후 육각마개를 필히 막아야 합니다.

After assembly and oil lubrication, a hexagonal resin plug should be necessarily stopped up.