


LM Stroke

ST Series



ST

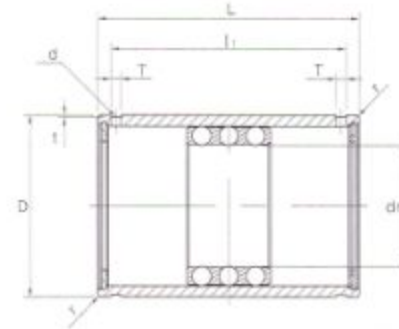


ST..(경하중용)

호칭번호 (Bearing No.)	최대 스트 로크	기 본 동정격 하중 C kN	기 본 정정격 하중 Co kN	질량 g	호칭번호 (Bearing No.)	최대 스트 로크	기 본 동정격 하중 C kN	기 본 정정격 하중 Co kN	질량 g	주 요 치 수 (Dimensions) mm										
										내접원경 dr		외경 D		길 이 L		/1	T	t	d	r
											허용차		허용차		허용차					
ST 6	14	0.98	0.23	8.0	-	-	-	-	-	6 ^{+0.018 +0.010}	12	0 ^{+0.00}	19	0 ^{-0.2}	13.5	1.1	0.25	-	0.3	
ST 8	24	0.98	0.27	16.4	ST 8B	8	2.06	0.55	17.6	8 ^{+0.022 +0.013}	15		24		20.1	1.5	0.5	1.5	0.5	
ST 10	30	2.35	0.62	31.5	ST 10B	8	4.61	1.27	34.5	10 ^{+0.027 +0.016}	19	0 ^{0.009}	30		25.7	1.5	0.5	1.5	0.5	
ST 12	32	4.02	1.08	47	ST 12B	8	8.14	2.25	53.5	12	23		32		27.5	1.5	0.5	1.5	0.5	
ST 16	40	4.02	1.27	77	ST 16B	16	8.04	2.65	85	16	28		37		32.1	1.5	0.5	1.5	0.5	
ST 20	54	4.12	1.57	109	ST 20B	28	8.33	3.24	120	20	32	0 ^{0.011}	45	0 ^{-0.3}	39.8	2	0.5	2	0.5	
ST 25	54	4.12	1.76	128	ST 25B	28	8.14	3.63	142	25 ^{+0.033 +0.020}	37		45		39.8	2	0.5	2	1	
ST 30	82	9.31	4.12	240	ST 30B	44	18.7	8.14	275	30	45		65		58.5	2.5	0.5	2.5	1	
ST 35	92	9.41	4.51	370	ST 35B	54	18.7	9.02	410	35	52	0 ^{0.013}	70		63.5	2.5	0.7	2.5	1.5	
ST 40	108	12.5	6.18	570	ST 40B	66	25.0	12.4	635	40 ^{+0.041 +0.025}	60		80		73.3	2.5	0.7	2.5	1.5	
ST 45	108	12.6	6.76	625	ST 45B	66	25.2	13.5	695	45	65		80	73.3	2.5	0.7	2.5	1.5		
ST 50	138	16.3	8.82	910	ST 50B	88	32.5	17.7	1,020	50	72		100	92.4	3	1	3	1.5		


▶ 註 이 품목은 주문에 의하여 생산합니다.
These types are produced on customer's request.

LM Stroke


ST Series

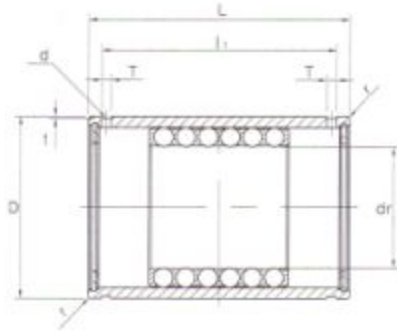

ST..B(중하중용)

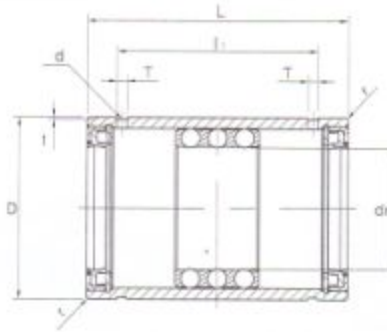

ST..UU(경하중용)

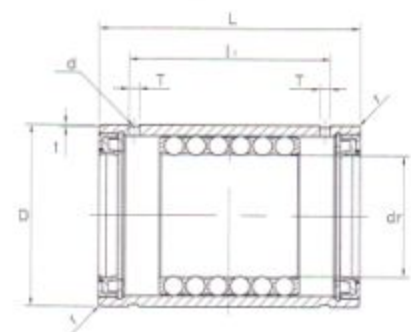

ST..UUB(중하중용)

호칭번호 (Bearing No.)	최대 스트 로크	기본 동정격 하중 C kN	기본 정정격 하중 Co kN	질량 g	호칭번호 (Bearing No.)	최대 스트 로크	기본 동정격 하중 C kN	기본 정정격 하중 Co kN	질량 g	주 요 치 수 (Dimensions) mm										
										내접원경 dr		외 경 D		길 이 L		l ₁	T	t	d	r
											허용차		허용차		허용차					
ST 8UU	14	0.98	0.27	17	-	-	-	-	-	8	+0.022 +0.013	15	0	24	0 -0.2	15.3	1.5	0.5	1.5	1
ST 10UU	16	2.35	0.62	31	-	-	-	-	-	10	+0.027 +0.016	19	0 0.009	30		18.5	1.5	0.5	1.5	1
ST 12UU	17	4.02	1.08	49	-	-	-	-	-	12		23		32		20.1	1.5	0.5	1.5	1
ST 16UU	24	4.02	1.27	80	-	-	-	-	-	16		28		37		24.1	1.5	0.5	1.5	1
ST 20UU	32	4.12	1.57	112	ST 20UUB	12	8.33	3.24	125	20	+0.033 +0.020	32	0 0.011	45	0 -0.3	30.8	2	0.5	2	1
ST 25UU	32	4.12	1.76	132	ST 25UUB	12	8.14	3.63	145	25		37		45		30.8	2	0.5	2	1
ST 30UU	65	9.31	4.12	245	ST 30UUB	27	18.7	8.14	280	30		45		65		50.1	2.5	0.5	2.5	1
ST 35UU	75	9.41	4.51	375	ST 35UUB	37	18.7	9.02	420	35		52		70		55.1	2.5	0.7	2.5	2
ST 40UU	91	12.5	6.18	580	ST 40UUB	49	25.0	12.4	640	40	+0.041 +0.025	60	0 0.013	80		64.9	2.5	0.7	2.5	2
ST 45UU	91	12.6	6.76	635	ST 45UUB	49	25.2	13.5	705	45		65		80		64.9	2.5	0.7	2.5	2
ST 50UU	120	16.3	8.82	920	ST 50UUB	70	32.5	17.7	1,030	50		72		100		83.4	3	1	3	2