




Top Roller Chains

双节距顶滚子链条

Top Roller Chain - Double Pitch Type 双节距顶滚子链条


Double strand 2 双排

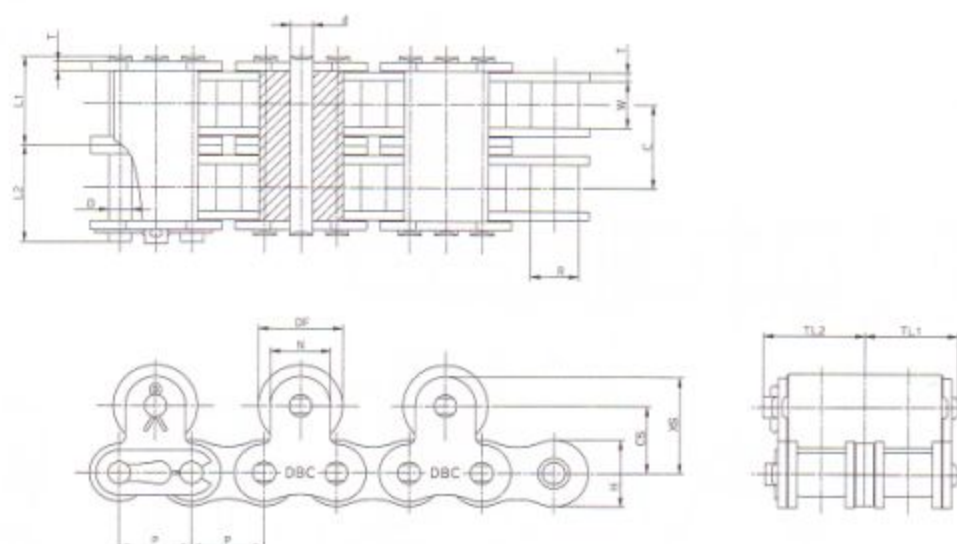

unit : mm

DONG BO Chain No.	Pitch P	Inner Width W	Transverse Pitch C	Roller Dia		Plate		Pin			Attachment Dimensions					
				S-Roller Type	R-Roller Type	T	H	D	L1	L2	DF	CS	XS	TL1	TL2	d
DBC 2040-2 TR	25.40	7.95	14.4	7.94	15.88	1.5	12.0	3.97	8.25	9.95	15.88	15.0	21.0	15.65	17.25	3.97
DBC 2050-2 TR	31.75	9.53	18.1	10.16	19.05	2.0	15.0	5.09	10.3	12.0	19.05	19.0	26.5	19.55	21.95	5.95
DBC 2060-2 TR	38.10	12.70	26.2	11.91	22.23	3.2	18.1	5.96	14.55	16.55	22.23	23.0	31.6	27.85	30.85	7.94
DBC 2080-2 TR	50.80	15.88	32.6	15.88	28.58	4.0	24.1	7.93	18.3	20.9	28.58	29.0	40.5	34.8	37.5	11.1
DBC 2100-2 TR	63.50	19.05	39.1	19.05	39.69	4.8	30.1	9.54	21.8	24.5	39.69	35.4	49.7	41.65	46.75	11.1

Derailing Prevention Type 防止脱离型

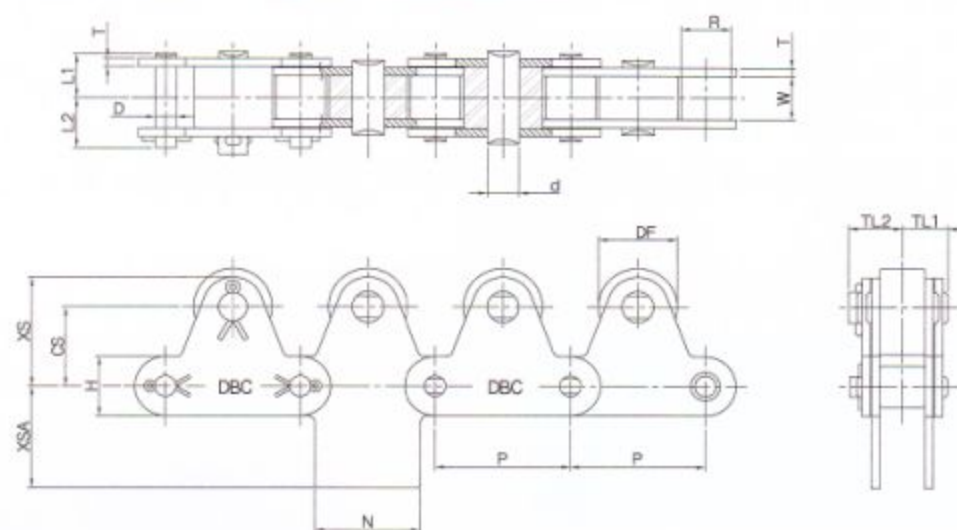

unit : mm

DONG BO Chain No.	Pitch P	Inner Width W	Roller Dia		Plate		Pin			Attachment Dimensions								
			S-Roller Type	R-Roller Type	T	H	D	L1	L2	DF	CS	XS	TL1	TL2	TL	d	N	XSA
DBC 2040-2 TR	25.40	7.95	7.94	15.88	1.5	12.0	3.97	8.25	9.95	15.88	15.0	21.0	8.45	10.05	13.6	3.97	19.1	12.7
DBC 2050-2 TR	31.75	9.53	10.16	19.05	2.0	15.0	5.09	10.3	12.0	19.05	19.0	26.5	10.5	12.9	16.6	5.95	23.8	15.9
DBC 2060-2 TR	38.10	12.70	11.91	22.23	3.2	18.1	5.96	14.55	16.55	22.23	23.0	31.6	14.75	17.75	22.6	7.94	28.6	19.1
DBC 2080-2 TR	50.80	15.88	15.88	28.58	4.0	24.1	7.93	18.3	20.9	28.58	29.0	40.5	18.15	21.25	27.8	11.1	38.1	25.4
DBC 2100-2 TR	63.50	19.05	19.05	39.69	4.8	30.1	9.54	21.8	24.5	39.69	35.4	49.7	22.1	27.2	34.1	11.1	47.6	31.8