

ROD ENDS

무급유형, mm치수, 스테인리스
MAINTENANCE-FREE
METRIC DIMENSION
MALE THREAD


STAINLESS STEEL




JMTS



JMTS(d<14mm)

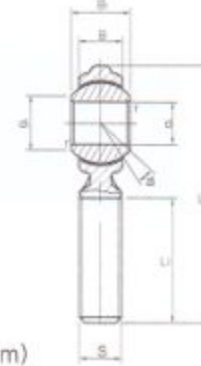

JMTS(d≥14mm)

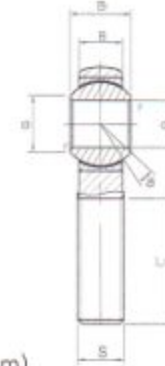

호칭번호 (Bearing No.)	질량 (Mass) gr.	주요 치수 (Dimensions) mm										요동각도 (Tilting angle) α°	볼 직경 (Spherical Diameter) mm	정부하용량 (Basic Static Load Ratings) Co Kgf
		d	나사 (Threads) KS 2급/S	D	B +0.1 -0.4	B1 +0 -0.1	d1	L (max)	L1 (max)	L2	r			
JMTS 3	4.5	3	M3×0.5	12	4.5	6	7.4	33	27	17	0.5	11	9.525	270
JMTS 4	7	4	M4×0.7	14	5	7	7.5	37	30	19	0.5	12	10	310
JMTS 5	12.5	5	M5×0.8	17	6	8	7.7	42	33.5	20	0.5	13	11.1	350
JMTS 6	19	6	M6×1.0	18.5	6.75	9	9	46	36.75	22	0.5	13	12.7	500
JMTS 8	32	8	M8×1.25	24	9	12	10.4	54	42	25	0.5	13	15.87	700
JMTS 10	54	10	M10×1.5	26	10.5	14	12.9	61	47.5	26.5	0.5	13	20.6	960
JMTS 12	85	12	M12×1.75	31	12	16	15.8	69.5	54	33	0.5	13	22.5	1,120
JMTS 14	126	14	M14×2.0	35	13.5	19	16.9	76.5	59	36	0.5	15	25.4	1,550
JMTS 16	185	16	M16×2.0	39	15	21	19.3	85	65.5	40	0.5	15	28.5	2,060
JMTS 18	260	18	M18×1.5	43	16.2	23	21.7	94.5	73	44	0.5	15	31.6	2,570
JMTS 20	340	20	M20×1.5	48	18	25	23.8	103.5	80.5	47	0.5	15	34.5	2,840
JMTS 22	435	22	M22×1.5	54	20	28	25.8	113	86	51	0.5	15	38.1	3,400
JMTS 25	650	25	M24×2.0	64	22	31	29.8	128	96	57	0.5	15	43	5,980
JMTS 30	910	30	M30×2.0	73	25	37	34.8	147.5	111	66	0.5	15	47	7,600