


| LMEFM 法兰式加长型直线轴承 |

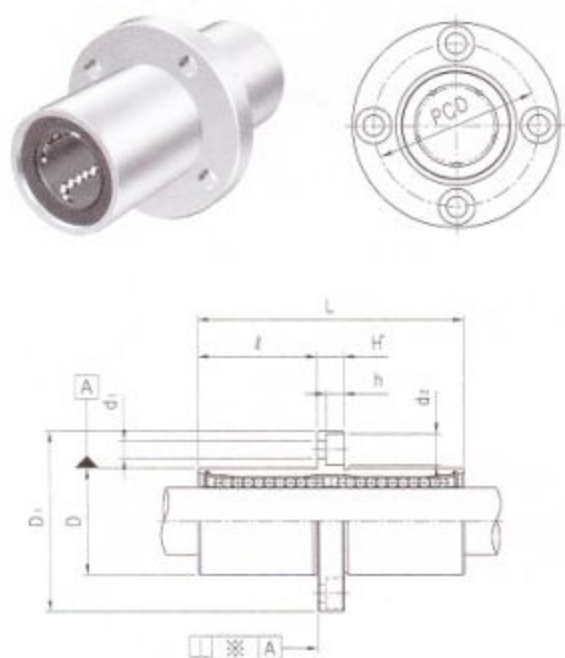

欧洲标准园型中间法兰式直线轴承	LMEFM	20	UU	-	A	N	S
LM轴外径							
密封形式	无密封：空白 端密封：U 两端密封：UU						
保持架选项	塑料保持架(标准型)：空白 钢保持架(高温、真空)：A						
外套表面处理	无镀(标准型)：空白 无电解镀镍(耐腐蚀)：N 镀Raydent(耐腐蚀)：R						
滚珠选项	高碳轴承钢(SUJ2)滚珠：空白 不锈钢滚珠：S						

型号		内径		D		L		D ₁		l		H		PCD		d ₁		d ₂		h		垂直度	基本额定载荷(N)		滚珠	重量
塑料保持架	钢保持架	dr.	公差	mm	公差																μm	额定动载荷(C)	额定静载荷(C ₀)	列数	(gf)	
LMEFM8	LMEFM8-A	8	$+0.009$ -0.001	16	0 -0.009	45	32	20	5	24	3.4	6.5	3.3	15	430	780	4	53								
LMEFM12	LMEFM12-A	12	$+0.009$ -0.001	22	0 -0.011	57	42	25.5	6	32	4.5	8	4.4	15	650	1200	4	100								
LMEFM16	LMEFM16-A	16	$+0.011$ -0.001	26	0 -0.011	70	46	32	6	36	4.5	8	4.4	15	1230	2350	5	187								
LMEFM20	LMEFM20-A	20	$+0.011$ -0.001	32	0 -0.011	80	54	36	8	43	5.5	9.5	5.4	17	1400	2750	5	260								
LMEFM25	LMEFM25-A	25	$+0.013$ -0.002	40	0 -0.013	112	62	52	8	51	5.5	9.5	5.4	17	1560	3140	6	515								
LMEFM30		30	$+0.013$ -0.002	47	0 -0.013	123	76	56.5	10	62	6.6	11	6.5	17	2940	5490	6	655								
LMEFM40		40	$+0.016$ -0.004	62	0 -0.015	154	98	70.5	13	80	9	14	8.6	20	3430	8040	6	1560								
LMEFM50		50	$+0.016$ -0.004	75	0 -0.015	192	112	89.5	13	94	9	14	8.6	20	6080	15900	6	3500								
LMEFM60		60	$+0.016$ -0.004	90	0 -0.020	211	134	96.5	18	112	11	17.5	10.8	25	7650	20000	6	4500								

注1) 对额定动载荷

C: 额定寿命50Km时

C₁₀₀: 额定寿命100Km时, $C_{100} = C/1.26$

例) LM12 C: 410N, $C_{100} = 410/1.26 = 325.40N$

2) 表中重量是装有塑料保持架轴承的

3) 主要尺寸是mm