


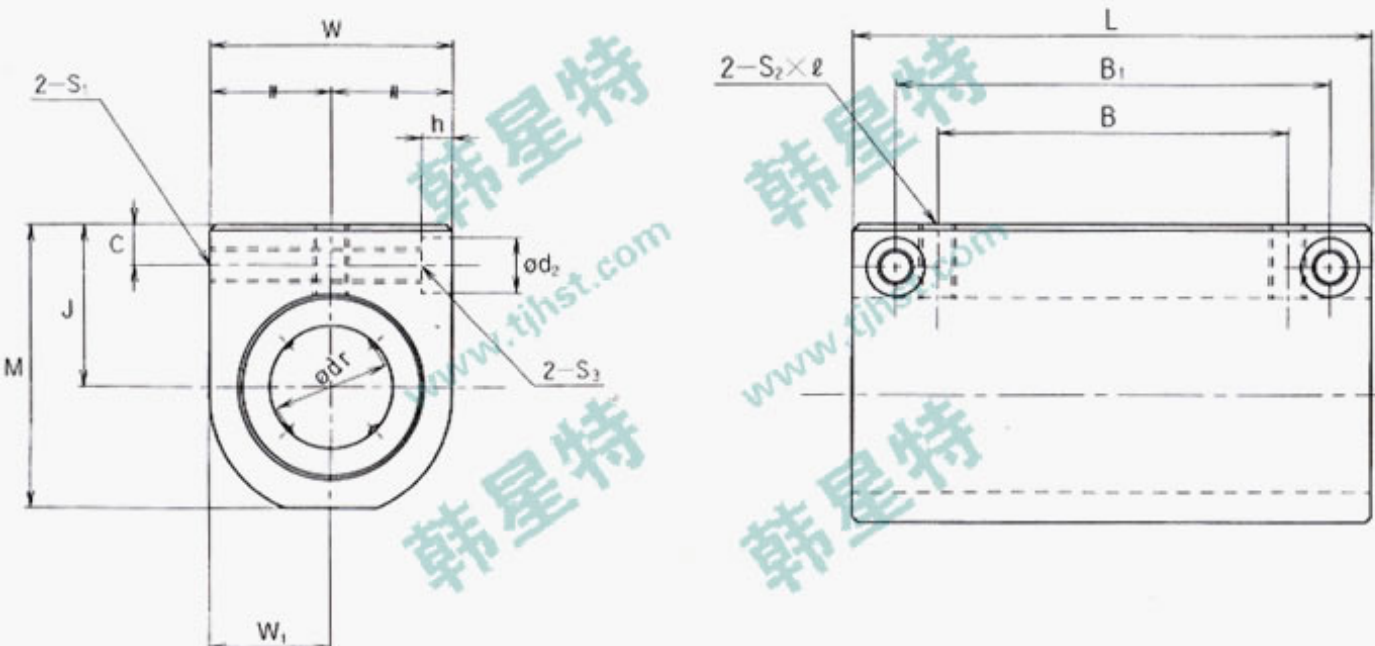

Model no.	Outer dimensions			LM case dimensions					
	Height M	Width W	Length L	Mounting hole position			Tap		Through-hole bolt
				B	B ₁	C	S ₁	S ₂ × l	S ₃
SH 3LUU	14	10	23	10	18	3	M3	M3×5.5	M2
SH 4LUU	16	12	27	14	22	3	M3	M3×6	M2
SH 5LUU	18	14	32	18	26	3	M3	M3×6	M2
SH 6LUU	22	16	40	20	30	5	M4	M4×8	M3
SH 8LUU	26	20	52	30	42	5	M4	M5×8.5	M3
SH 10LUU	32	26	60	36	50	6	M5	M6×9.5	M4
SH 12LUU	34	28	62	36	50	6	M5	M6×9.5	M4
SH 13LUU	36	30	66	40	54	6	M5	M6×9.5	M4
SH 16LUU	42	36	76	52	66	6	M5	M6×10	M4
SH 20LUU	49	42	86	58	72	7	M6	M6×12	M5

LM case dimensions						Combination bushing			
Center height J ±0.02	W ₁ ±0.02	d ₂	h	Inscribed circle diameter d _r Tolerance	Unit weight g	Model no.	Basic load rating		
							C N	C ₀ N	
9	5	4.2	1.5	3	8.5	LM 3U	139	216	
10	6	4.2	1.5	4	13	LM 4U	139	254	
11	7	4.2	1.5	5	22	LM 5U	263	412	
14	8	6.5	3.3	6	35	LM 6U	324	529	
16	10	6.5	3.3	8	65	LM 8U	431	784	
19	13	8	4.4	10	125	LM 10U	588	1100	
20	14	8	4.4	12	155	LM 12U	657	1200	
21	15	8	4.4	13	190	LM 13U	814	1570	
24	18	8	4.4	16	295	LM 16U	1230	2350	
28	21	9.5	5.4	20	425	LM 20U	1400	2750	