


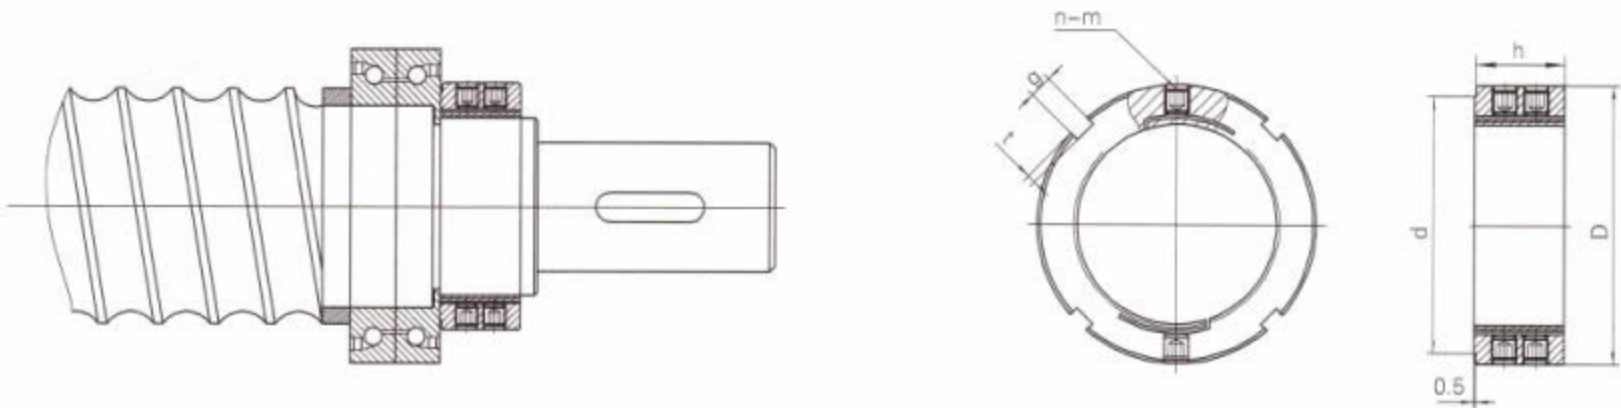

适用于球轴承的重型紧固，加厚的螺母尺寸，双排加大的锁紧螺钉确保锁紧力矩的增加及更强的抗轴向负载力。垂直于螺纹端的接触面可以调节、固定轴承及其它需要精密公差的机械元件。

- 材质: DIN C45
- 硬度: HRC 28-32°
- 螺纹精度: ISO 4H
- 螺纹精度: ISO 4H
- 端面偏摆: 0.002
- 端面偏摆: 0.005

型号	尺寸						扭紧力矩 (NM)
	D	h	g	t	d	n-m	
TRA M 20 × 1.5	42	16	5	2	37	2-M8	18.0
TRA M 22 × 1.5	44	16	5	2	39	2-M8	18.0
TRA M 25 × 1.5	47	16	5	2	42	2-M8	18.0
TRA M 30 × 1.5	52	16	5	2	47	2-M8	18.0
TRA M 32 × 1.5	55	16	5	2	50	2-M8	18.0
TRA M 35 × 1.5	60	16	5	2	55	2-M8	18.0
TRA M 38 × 1.5	62	16	5	2	57	2-M8	18.0
TRA M 40 × 1.5	65	16	6	2.5	59	2-M8	18.0
TRA M 42 × 1.5	68	16	6	2.5	62	2-M8	18.0
TRA M 45 × 1.5	70	16	6	2.5	64	2-M8	18.0
TRA M 50 × 1.5	72	28	6	2.5	66	4-M8	18.0
TRA M 55 × 1.5	78	28	7	3	71	4-M8	18.0
TRA M 55 × 2.0	78	28	7	3	71	4-M8	18.0
TRA M 60 × 1.5	83	28	7	3	76	4-M8	18.0
TRA M 60 × 2.0	83	28	7	3	76	4-M8	18.0
TRA M 65 × 1.5	88	28	7	3	81	4-M8	18.0
TRA M 65 × 2.0	88	28	7	3	81	4-M8	18.0
TRA M 70 × 1.5	96	28	8	3.5	88	4-M8	18.0
TRA M 70 × 2.0	96	28	8	3.5	88	4-M8	18.0
TRA M 75 × 1.5	104	28	8	3.5	96	4-M8	18.0
TRA M 75 × 2.0	104	28	8	3.5	96	4-M8	18.0
TRA M 80 × 2.0	110	32	8	3.5	102	4-M10	35.0
TRA M 85 × 2.0	115	32	8	3.5	107	4-M10	35.0
TRA M 90 × 1.5	120	32	10	4	111	4-M10	35.0
TRA M 90 × 2.0	120	32	10	4	111	4-M10	35.0
TRA M 95 × 2.0	125	32	10	4	116	4-M10	35.0
TRA M 100 × 2.0	130	32	10	4	121	4-M10	35.0
TRA M 105 × 2.0	135	32	12	5	124	4-M10	35.0
TRA M 110 × 2.0	138	32	12	5	127	4-M10	35.0
TRA M 115 × 2.0	145	32	12	5	134	4-M10	35.0
TRA M 120 × 2.0	148	32	12	5	137	4-M10	35.0
TRA M 125 × 2.0	155	32	12	5	144	4-M10	35.0
TRA M 130 × 2.0	158	32	12	5	147	4-M10	35.0
TRA M 135 × 2.0	165	32	14	6	152	4-M10	35.0
TRA M 140 × 2.0	168	32	14	6	155	4-M10	35.0
TRA M 145 × 2.0	175	32	14	6	162	4-M10	35.0
TRA M 150 × 2.0	178	32	14	6	165	4-M10	35.0
TRA M 155 × 3.0	185	32	14	6	172	4-M10	35.0
TRA M 160 × 3.0	188	32	14	6	175	4-M10	35.0
TRA M 165 × 3.0	195	32	14	6	182	4-M10	35.0
TRA M 170 × 3.0	198	32	14	6	185	4-M10	35.0
TRA M 180 × 3.0	210	32	14	6	197	4-M10	35.0
TRA M 190 × 3.0	220	32	14	6	207	4-M10	35.0
TRA M 200 × 3.0	230	32	14	6	217	4-M10	35.0

备注 1. NUT 承接 M2 ~ M1000 各种材质、非标准螺距以及特殊外型螺母的订制
2. 如您订购左旋螺纹之螺母时，请加注 -L 例: NFM30 × 1.5 P-L
3. 以上资料仅供参考，本公司拥有修改之权利

1Nm=10.2kgf.cm=0.73lb.ft