



## YOKE TYPE TRACK ROLLERS

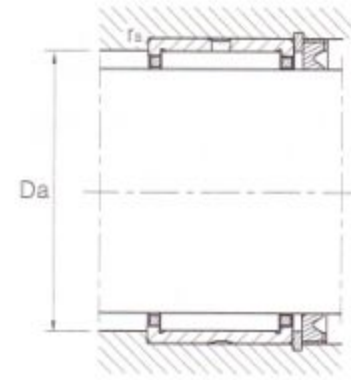

NK

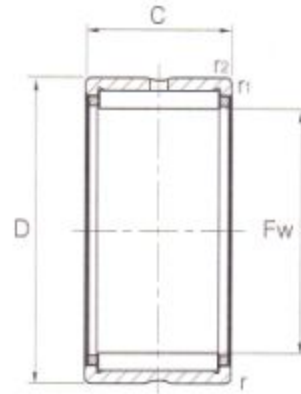

NK..


| 호칭번호<br>(Bearing No.) | 주요치수<br>(Dimensions) mm |    |    |                        | 기본<br>동정격 하중<br>C<br>Kgf | 기본<br>정정격 하중<br>Co<br>Kgf | 피로 하중<br>한계<br>Pu<br>Kgf | 정격회전<br>윤활 그리스<br>r/min | 정격회전<br>오일<br>r/min | 무 게<br>Kg | 받침과 필렛치수<br>mm |          |          | 적절한<br>씨일링 링<br>치수<br>mm |
|-----------------------|-------------------------|----|----|------------------------|--------------------------|---------------------------|--------------------------|-------------------------|---------------------|-----------|----------------|----------|----------|--------------------------|
|                       | Fw                      | D  | C  | r <sub>1,2</sub><br>최소 |                          |                           |                          |                         |                     |           | Fw             | Da<br>최대 | ra<br>최대 |                          |
| NK 29/20              | 29                      | 38 | 20 | 0.3                    | 2,130                    | 3,530                     | 450                      | 8,550                   | 13,300              | 0.054     | 29             | 36       | 0.3      | 29×38×4                  |
| NK 29/30              |                         | 38 | 30 | 0.3                    | 3,090                    | 5,810                     | 750                      | 8,550                   | 13,300              | 0.084     |                | 36       | 0.3      | 29×38×4                  |
| NK 30/20              | 30                      | 40 | 20 | 0.3                    | 2,210                    | 3,680                     | 470                      | 8,070                   | 12,350              | 0.065     | 30             | 38       | 0.3      | 30×40×4                  |
| NK 30/30              |                         | 40 | 30 | 0.3                    | 3,190                    | 6,100                     | 790                      | 8,070                   | 12,350              | 0.098     |                | 38       | 0.3      | 30×40×4                  |
| NK 32/20              | 32                      | 42 | 20 | 0.3                    | 2,250                    | 3,920                     | 500                      | 7,600                   | 11,400              | 0.068     | 32             | 40       | 0.3      | 32×42×4                  |
| NK 32/30              |                         | 42 | 30 | 0.3                    | 3,300                    | 6,340                     | 830                      | 7,600                   | 11,400              | 0.10      |                | 40       | 0.3      | 32×42×4                  |
| NK 35/20              | 35                      | 45 | 20 | 0.3                    | 2,380                    | 4,360                     | 550                      | 7,120                   | 10,450              | 0.074     | 35             | 43       | 0.3      | 35×45×4                  |
| NK 35/30              |                         | 45 | 30 | 0.3                    | 3,470                    | 6,970                     | 920                      | 7,120                   | 10,450              | 0.11      |                | 43       | 0.3      | 35×45×4                  |
| NK 37/20              | 37                      | 47 | 20 | 0.3                    | 2,430                    | 4,500                     | 560                      | 7,120                   | 10,450              | 0.077     | 37             | 45       | 0.3      | 37×47×4                  |
| NK 37/30              |                         | 47 | 30 | 0.3                    | 3,570                    | 7,410                     | 960                      | 7,120                   | 10,450              | 0.11      |                | 45       | 0.3      | 37×47×4                  |
| NK 38/20              | 38                      | 48 | 20 | 0.3                    | 2,470                    | 4,750                     | 600                      | 7,120                   | 10,450              | 0.080     | 38             | 46       | 0.3      | 38×48×4                  |
| NK 38/30              |                         | 48 | 30 | 0.3                    | 3,620                    | 7,750                     | 1,000                    | 7,120                   | 10,450              | 0.12      |                | 46       | 0.3      | 38×48×4                  |
| NK 40/20              | 40                      | 50 | 20 | 0.3                    | 2,550                    | 4,940                     | 620                      | 6,650                   | 9,500               | 0.083     | 40             | 48       | 0.3      | 40×50×4                  |
| NK 40/30              |                         | 50 | 30 | 0.3                    | 3,680                    | 8,040                     | 1,040                    | 6,650                   | 9,500               | 0.13      |                | 48       | 0.3      | 40×50×4                  |
| NK 42/20              | 42                      | 52 | 20 | 0.3                    | 2,610                    | 5,130                     | 640                      | 6,360                   | 9,020               | 0.086     | 42             | 50       | 0.3      | 42×52×4                  |
| NK 42/30              |                         | 52 | 30 | 0.3                    | 3,790                    | 8,380                     | 1,080                    | 6,360                   | 9,020               | 0.13      |                | 50       | 0.3      | 42×52×4                  |
| NK 43/20              | 43                      | 53 | 20 | 0.3                    | 2,660                    | 5,330                     | 670                      | 6,360                   | 9,020               | 0.086     | 43             | 51       | 0.3      | 43×53×4                  |
| NK 43/30              |                         | 53 | 30 | 0.3                    | 3,890                    | 8,720                     | 1,120                    | 6,360                   | 9,020               | 0.13      |                | 51       | 0.3      | 43×53×4                  |
| NK 45/20              | 45                      | 55 | 20 | 0.3                    | 2,660                    | 5,520                     | 690                      | 5,980                   | 8,550               | 0.092     | 45             | 53       | 0.3      | 45×55×4                  |
| NK 45/30              |                         | 55 | 30 | 0.3                    | 3,890                    | 9,010                     | 1,160                    | 5,980                   | 8,550               | 0.14      |                | 53       | 0.3      | 45×55×4                  |
| NK 47/20              | 47                      | 57 | 20 | 0.3                    | 2,830                    | 5,910                     | 740                      | 5,700                   | 8,070               | 0.095     | 47             | 55       | 0.3      | -                        |
| NK 47/30              |                         | 57 | 30 | 0.3                    | 4,050                    | 9,500                     | 1,250                    | 5,700                   | 8,070               | 0.14      |                | 55       | 0.3      | -                        |
| NK 50/25              | 50                      | 62 | 25 | 0.3                    | 3,680                    | 7,560                     | 960                      | 5,320                   | 7,600               | 0.16      | 50             | 58       | 0.6      | 50×62×5                  |
| NK 50/35              |                         | 62 | 35 | 0.3                    | 4,790                    | 10,660                    | 1,380                    | 5,320                   | 7,600               | 0.22      |                | 58       | 0.6      | 50×62×5                  |
| NK 55/25              | 55                      | 68 | 25 | 0.3                    | 3,890                    | 8,530                     | 1,080                    | 5,030                   | 7,200               | 0.18      | 55             | 64       | 0.6      | 55×68×8                  |
| NK 55/35              |                         | 68 | 35 | 0.3                    | 5,060                    | 11,820                    | 1,550                    | 5,030                   | 7,200               | 0.25      |                | 64       | 0.6      | 55×68×8                  |



## YOKE TYPE TRACK ROLLERS



SL

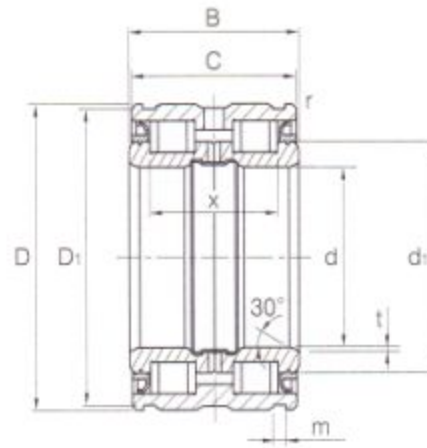

SL04..UU

| 호칭번호<br>(Bearing No.) | 질량<br>m<br>Kg | 주 요 치 수 (Dimensions) mm |     |    |    |                        |     |     |     |      |                | 기본<br>동정격하중<br>C<br>Kgf | 기본<br>정정격하중<br>C <sub>0</sub><br>Kgf | 피로한계<br>하중<br>P <sub>u</sub><br>Kgf | 정격회전<br>윤활<br>그리스<br>r/min |
|-----------------------|---------------|-------------------------|-----|----|----|------------------------|-----|-----|-----|------|----------------|-------------------------|--------------------------------------|-------------------------------------|----------------------------|
|                       |               | d                       | D   | B  | C  | D <sub>1</sub><br>+0.2 | m   | r   | t   | x    | d <sub>1</sub> |                         |                                      |                                     |                            |
| SL04 5004UU           | 0.2           | 20                      | 42  | 30 | 29 | 40.2                   | 1.8 | 0.3 | 0.5 | 22.5 | 30.55          | 3,900                   | 4,700                                | 400                                 | 3,800                      |
| SL04 5005UU           | 0.24          | 25                      | 47  | 30 | 29 | 45.2                   | 1.8 | 0.3 | 0.5 | 22.5 | 35.35          | 4,300                   | 5,600                                | 500                                 | 3,400                      |
| SL04 5006UU           | 0.37          | 30                      | 55  | 34 | 33 | 53                     | 2.1 | 0.3 | 0.5 | 25.5 | 40.6           | 4,800                   | 6,400                                | 600                                 | 2,800                      |
| SL04 5007UU           | 0.48          | 35                      | 62  | 36 | 35 | 60                     | 2.1 | 0.3 | 0.5 | 27.5 | 46.1           | 6,100                   | 8,500                                | 800                                 | 2,400                      |
| SL04 5008UU           | 0.56          | 40                      | 68  | 38 | 37 | 65.8                   | 2.7 | 0.6 | 0.8 | 28.5 | 51.4           | 7,300                   | 9,900                                | 900                                 | 2,200                      |
| SL04 5009UU           | 0.7           | 45                      | 75  | 40 | 39 | 72.8                   | 2.7 | 0.6 | 0.8 | 30.5 | 57             | 8,900                   | 12,600                               | 1,200                               | 2,000                      |
| SL04 5010UU           | 0.76          | 50                      | 80  | 40 | 39 | 77.8                   | 2.7 | 0.6 | 0.8 | 30.5 | 61.8           | 9,400                   | 13,700                               | 1,300                               | 1,900                      |
| SL04 5011UU           | 1.18          | 55                      | 90  | 46 | 45 | 87.4                   | 3.2 | 0.6 | 1   | 36   | 68.6           | 11,100                  | 16,900                               | 1,600                               | 1,700                      |
| SL04 5012UU           | 1.26          | 60                      | 95  | 46 | 45 | 92.4                   | 3.2 | 0.6 | 1   | 36   | 73.7           | 11,600                  | 18,300                               | 1,700                               | 1,600                      |
| SL04 5013UU           | 1.33          | 65                      | 100 | 46 | 45 | 97.4                   | 3.2 | 0.6 | 1   | 36   | 78.8           | 12,100                  | 19,600                               | 1,900                               | 1,500                      |
| SL04 5014UU           | 1.87          | 70                      | 110 | 54 | 53 | 107.1                  | 4.2 | 0.6 | 1   | 42   | 84.5           | 16,200                  | 25,600                               | 2,400                               | 1,300                      |
| SL04 5015UU           | 1.96          | 75                      | 115 | 54 | 53 | 112.1                  | 4.2 | 0.6 | 1   | 42   | 89.95          | 18,800                  | 29,000                               | 2,800                               | 1,300                      |
| SL04 5016UU           | 2.71          | 80                      | 125 | 60 | 59 | 122.1                  | 4.2 | 0.6 | 1.5 | 48   | 97.1           | 19,600                  | 31,500                               | 3,000                               | 1,200                      |

▶ 註 이 품목은 주문에 의하여 생산합니다.  
These types are produced on customer's request.