

Trolley Chain (Overhead Type)

悬挂链条

Trolley conveyor allows for maximum conveying flexibility in small spaces, because they can use the space three dimensionally. Dong Bo produce various range of trolley chains for this conveyor system.

Typical applications for our trolley chains include:

- Assembly lines : in Automobile and electronic industries.
- Conveying lines: Tyre, steel, textile, sanitary goods, etc.
- Painting, plating and drying lines in all industries.

Dong Bo trolley chain with high-precision built-in vertical bearings has outstanding stability, making much less noise than other brands and the chain can be custom-configured to any requirement. Our trolley chains are used in most modern automobile factories world wide.

悬挂链条可以在有限的空间里发挥最大的灵活性。东宝生产各种各样的悬挂链条。

悬挂链的典型应用：

- 组装线：应用与汽车和电子设备的组装
- 输送线：轮胎、钢铁、纺织品等
- 喷淋线：工业领域的喷淋及干燥

东宝悬挂链有内置的高精密度的垂直轴承，因此具有良好的稳定性并且和同类产品相比噪音更小，可依据客户订做产品。我们的悬挂链在世界范围内应用于诸多的汽车生产设备。


1. DX Type - Drop forged chain DX 型模锻链条



NZ. DU Type



with henger and pushen dog

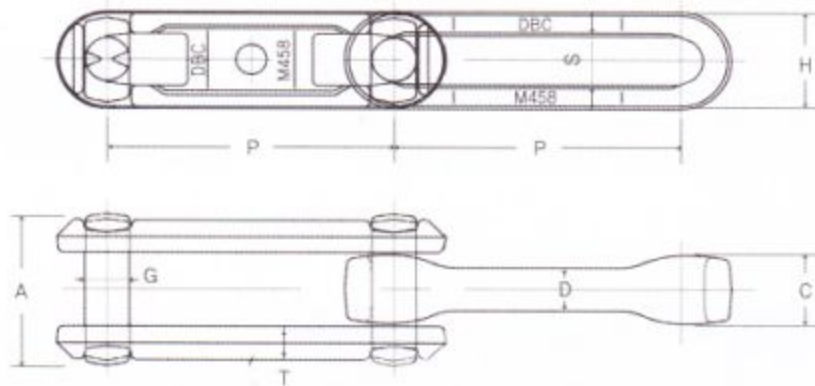

Used for feeder tables and in cane washing stations
Require no tools for assmly or disassembly

锻造链应用于自动进料设备和清洗设备
组装和拆卸无须工具

Forming: Precision forging method
Material: Alloy steel

成型：精密锻造的方式
材质：合金钢

unit : mm

DONG BO Chain No.	PITCH (P)		AVERAGE BREAKING LOAD(kgf)	APPROX. WEIGHT (kg/m)	WIDTH		HEIGHT (A)	PIN (G)	SIDE BAR	
	mm	in			H	S			C	D
SDF X348	76.2	3.015	11,000	3.2	28.6	14.4	46.3	12.7	19.5	13.0
SDF X458	102.1	4.031	22,000	4.6	35.7	17.9	55.6	16.0	25.4	16.2
SDF X678	153.6	6.031	38,000	9.0	50.8	25.8	77.0	22.0	31.8	21.0

Our chian pitches are based on the above table,However,if customers need special dimension,we also able to produce them upon customers need after consultation with us.

链条的尺寸基于以上表格，我们可以根据客户的需求生产制作特殊尺寸

2. Carrier 滑架



3. NZ, DV Type NZ, DV型



Application 应用

