


Block Chain

特殊输送链条

用于钢铁厂等恶劣的环境输送笨重的材料和高层物体。具有良好的抗疲劳强度和耐磨性。

用途：

1. 牵引物体
2. 搬运高温物体

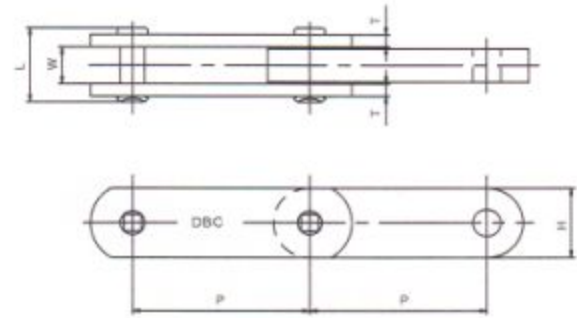

unit : mm




DONG BO Chain No.	Pitch P	Inner width W	Pin L	Plate		Avg. Breaking Load (kgf)	Approx. Weight (kg/m)
				T	H		
DF30150	150	23.3	50	7.9	38.1	31,500	7.0
DF30200	200	23.3	50	7.9	38.1	31,500	6.6
DF40150	150	26.5	52	7.9	44.5	40,500	9.0
DF40200	200	26.5	52	7.9	44.5	40,500	8.5
DF56200	200	29.5	60	9.5	54	56,500	12.3
DF56250	250	29.5	60	9.5	54	56,500	12.0
DF63200	200	31.5	62	9.5	57	63,000	13.7
DF63250	250	31.5	62	9.5	57	63,000	13.0
DF70200	200	33.5	64	9.5	63.5	73,500	16.2
DF70250	250	33.5	64	9.5	63.5	73,500	15.5
DF90200	200	38	70	10.5	72	92,500	21.0
DF90250	250	38	70	10.5	72	92,500	20.0
DF115250	250	40	78	12.7	76.2	114,000	25.0
DF115300	300	40	78	12.7	76.2	114,000	24.0
DF140250	250	47.5	88	14	85	143,000	32.0
DF140300	300	47.5	88	14	85	143,000	31.0
DF180300	300	52.5	98	16	95	177,500	39.0
DF180350	350	52.5	98	16	95	177,500	37.8
DF210300	300	59	104	16	110	219,500	50.0
DF210350	350	59	104	16	110	219,500	48.5
DF250300	300	66	118	19	112	248,500	58.8
DF250350	350	66	118	19	112	248,500	56.7
DF280300	300	67	118	19	122	277,500	66.0
DF280350	350	67	118	19	122	277,500	62.3

Application of Dog 适用案例：

固定型

连接在内外板上用于推送货物

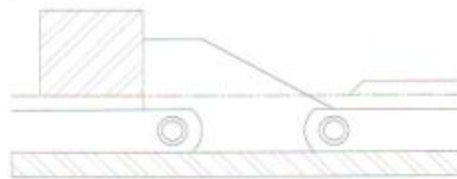

闪避型

附件自动下陷，与轨道相结合，上升后推送货物



倾斜型

连接在内板上，能自动上移，推送货物。



倾斜闪避型

复合型附件，用于推送货物

